


NEW PRODUCT

KAGA, INC.
<https://www.kagainc.co.jp/kaga-bouhantou.jp/en/>


LED Street Light

LEDEEMA


KLS-712-7M/12M

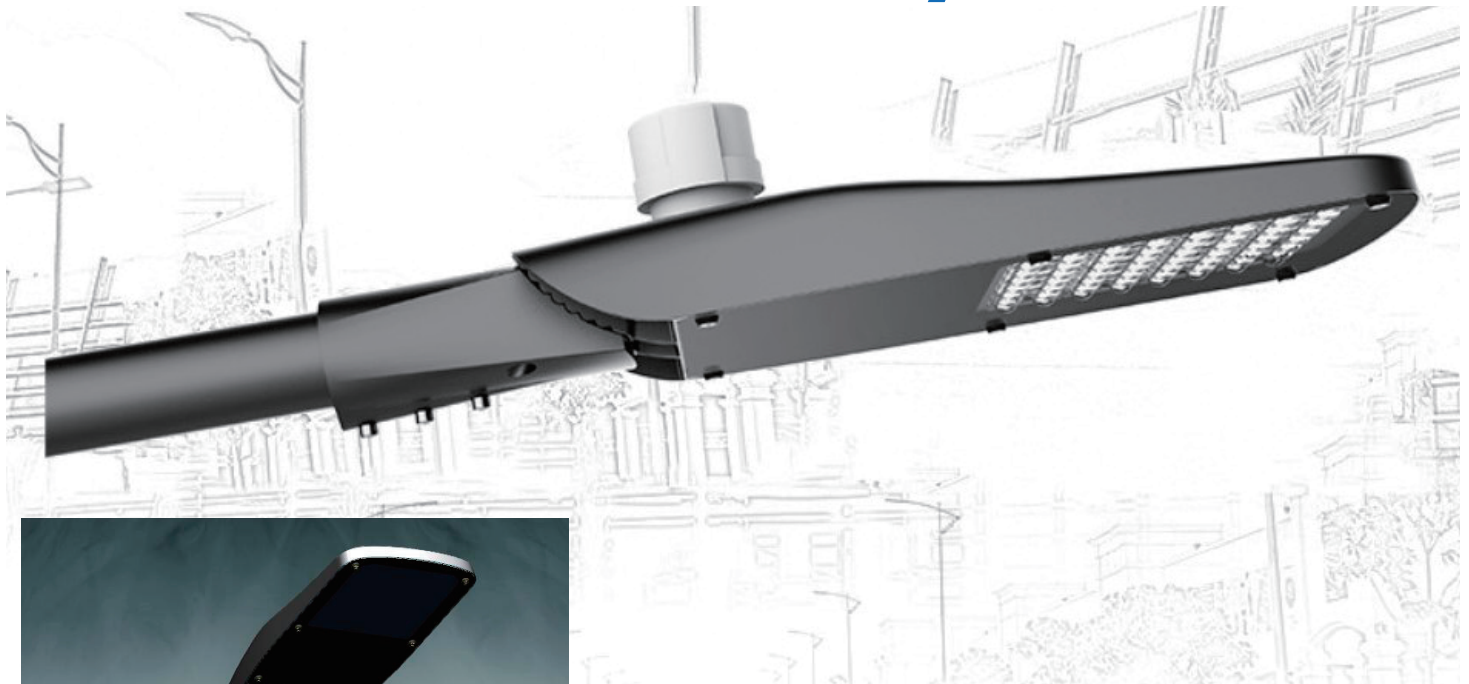

Angle adjustment bracket included (0° - 90°)

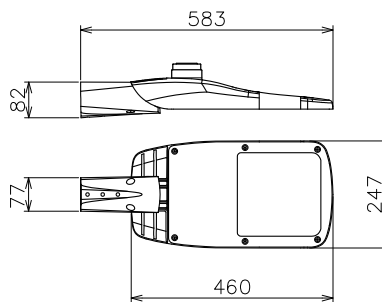

Dimension (KLS-712-7M)

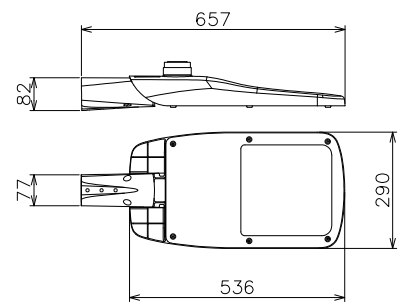

Dimension (KLS-712-12M)

KLS-712-7M/12M Specification (Reference)

Model Name	Lamp	Housing	Cover	Standard Color	Weight (kg)	Voltage (VAC)	Input Current (A)	Power Consumption (W)	Lumen Output (lm)	Luminous Efficacy (lm/W)	Lamp Life (hr) *1	Color Temperature (K)	Ingress Protection	Mechanical Impact Protection	Withstand Voltage Surge (kV)
KLS-712-7M	LED x 108	ADC	Tempered glass	Gray	4.8	100 - 240	0.35	75	9,000	120	60,000	5,000	IP66	IK09	20
KLS-712-12M	LED x 192	ADC	Tempered glass	Gray	6.5	100 - 240	0.55	120	14,400	120	60,000	5,000	IP66	IK09	20

NEMA socket for 7 terminals and dimmable feature. Dimmable power supply (0 - 10 V DC/PWM)

*1: Lumen maintenance factor 70%

<https://www.kagainc.co.jp/kaga-bouhantou.jp/en/>

KAGA, INC.

Head Office

Iwadaiwa Building 6F, 11-10 Nihombashikoami-cho, Chuo-ku, Tokyo, 103-0016, Japan

Phone: +81-3-6661-6341 FAX: +81-3-6661-6247

Osaka Office

Compagno Building 4F, 17-1 Enoki-cho, Suita-shi, Osaka 564-0053, Japan

Phone: +81-6-6337-9541 FAX: +81-6-6337-9542